

Environment
Canada

Environnement
Canada

Canada

Great Lakes
Grands Lacs


This brochure was designed for use by the general public who wish to know more about the water levels of the Great Lakes. Its main purpose is to explain the causes and effects of Great Lakes water level fluctuations.

To further general understanding, descriptions have been kept simple, and excessive use of technical words and details has been avoided. A list of references has been provided for readers who want additional information.

This brochure should lead to a greater understanding of the causes and effects of water level fluctuations. It is hoped that it will increase awareness of the importance of protecting and preserving, as well as living in harmony with the environment.

TABLE OF CONTENTS

Introduction	1
Physical Features	2
Hydrology	3
Factors Affecting Great Lakes Water Levels	6
Hydrograph of Great Lakes Water Levels and Precipitation	10
Effects of Water Level Fluctuations	14
Some Questions and Answers	17
IGLD 1985	19
Forecast of Great Lakes Water Levels – A Look at the Future	20
Conversion Table	20
References	Inside Back Cover

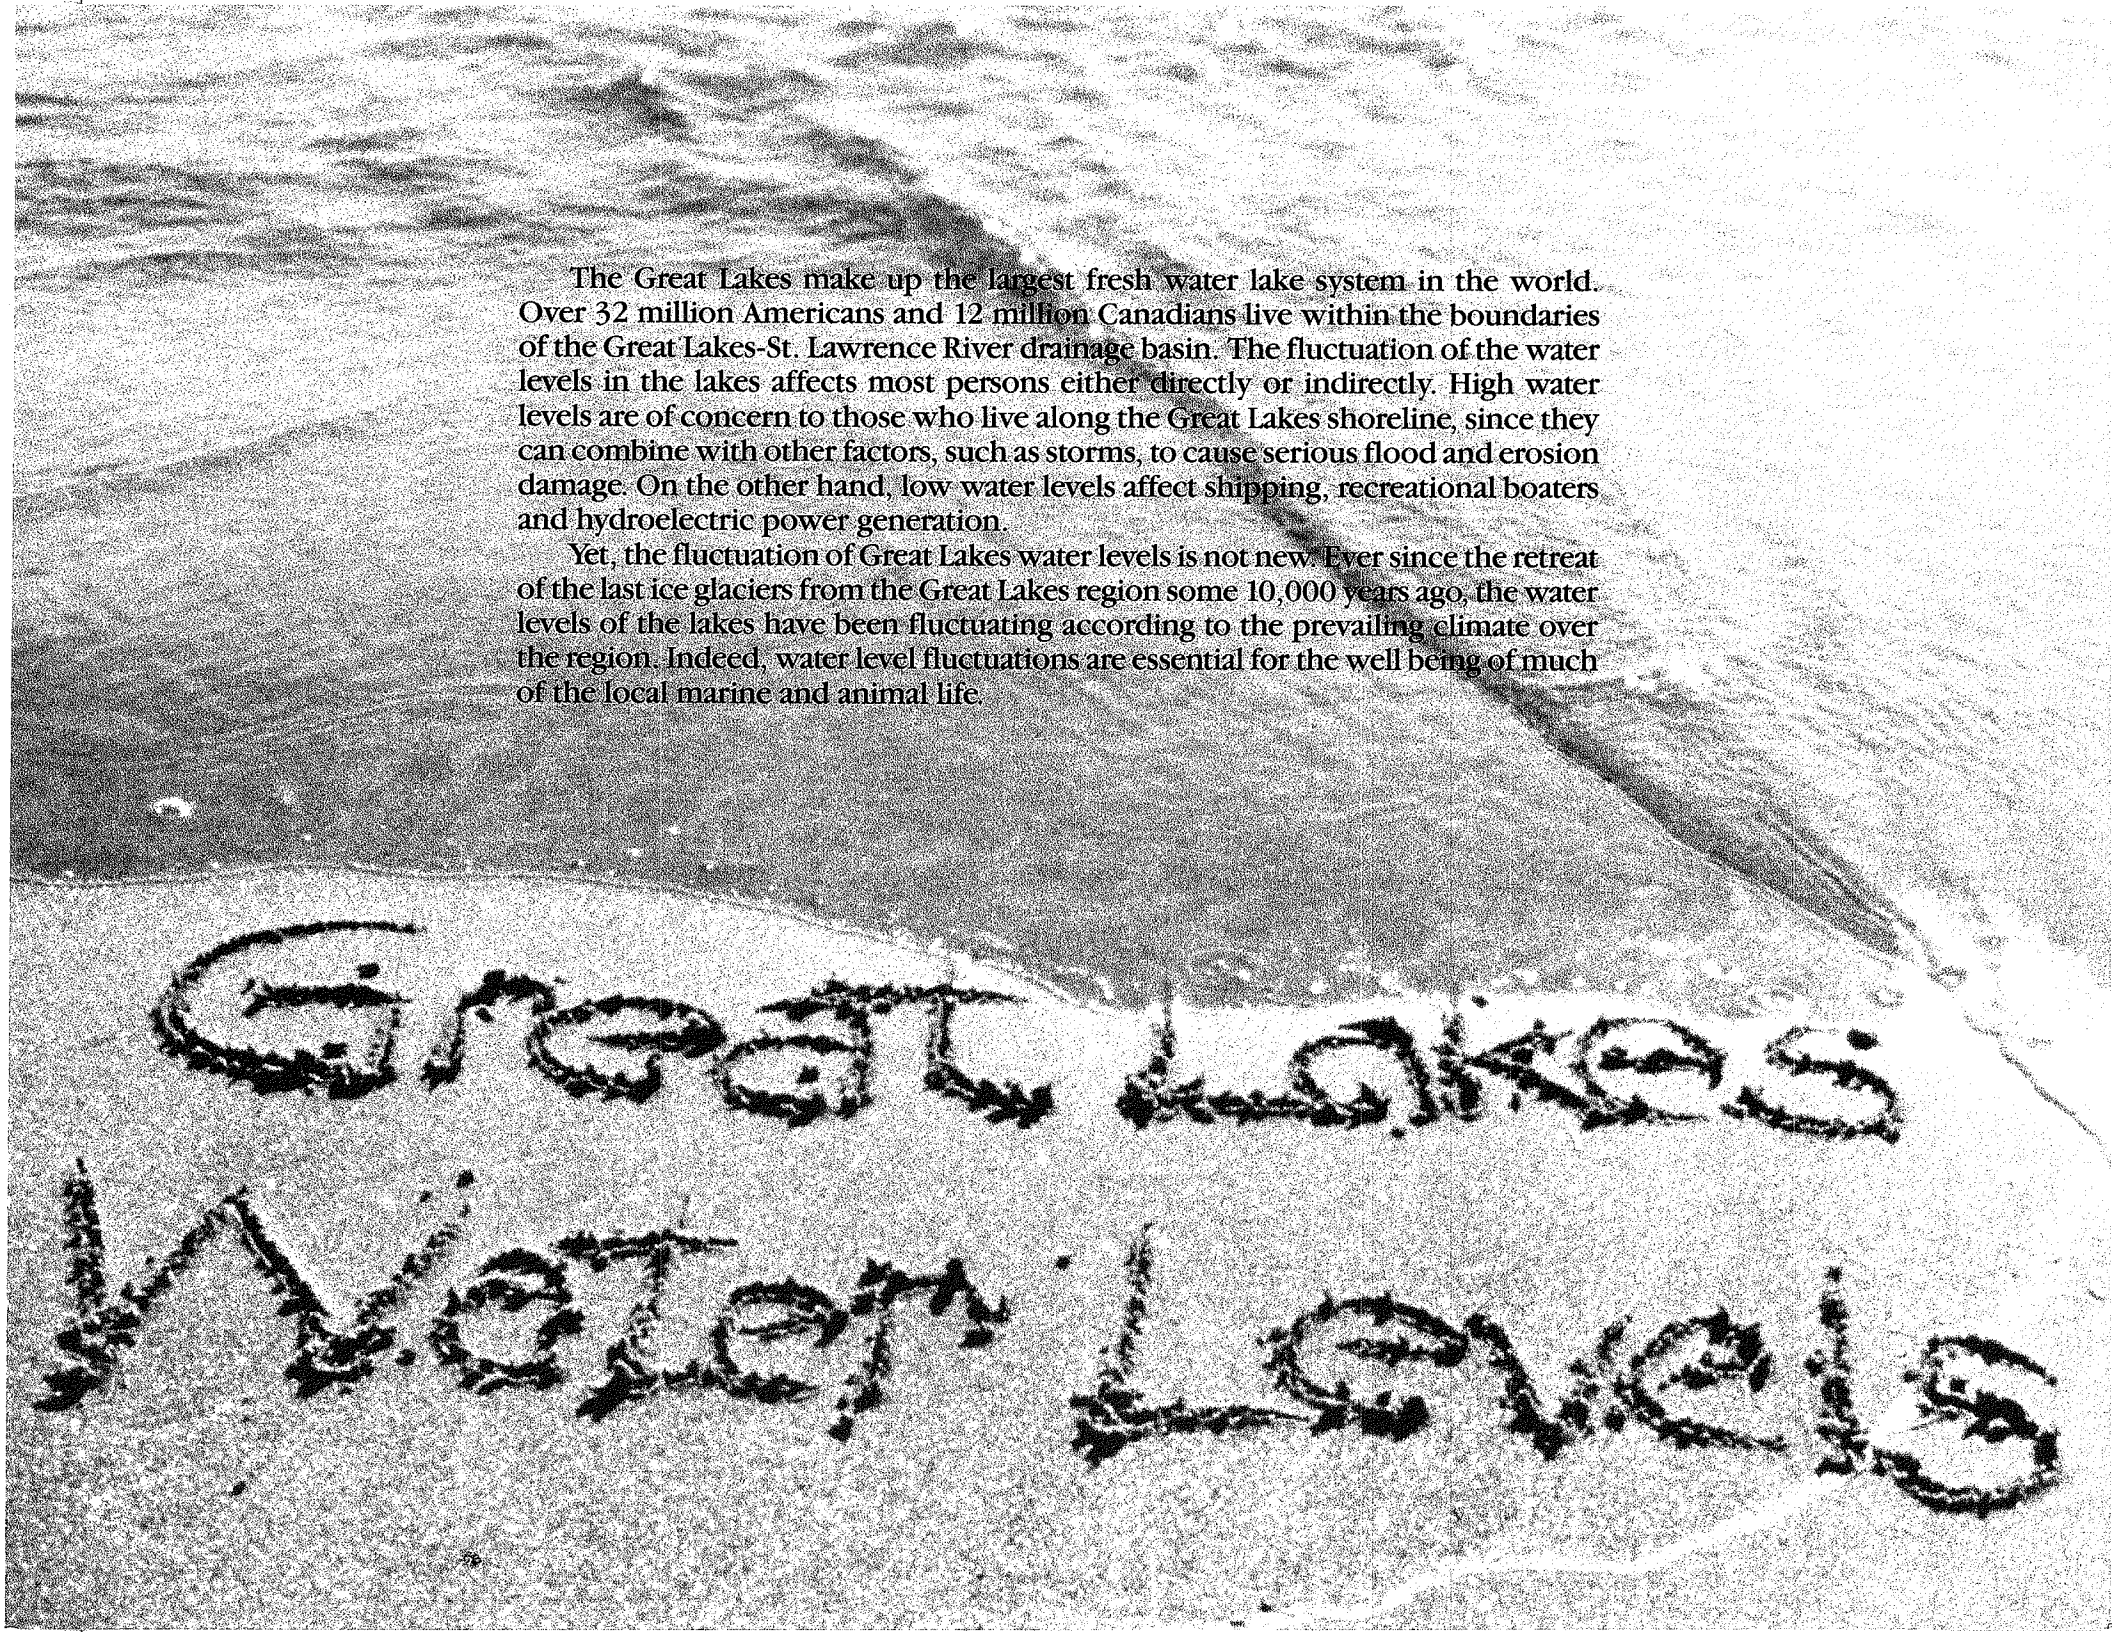An aerial photograph of a sandy beach. The words "Great Lakes Water Levels" are written in large, dark letters in the sand. The beach curves from the bottom left towards the top right. The water is visible in the upper portion of the image, with some ripples and a dark shadow cast by an object out of frame.


The Great Lakes make up the largest fresh water lake system in the world. Over 32 million Americans and 12 million Canadians live within the boundaries of the Great Lakes-St. Lawrence River drainage basin. The fluctuation of the water levels in the lakes affects most persons either directly or indirectly. High water levels are of concern to those who live along the Great Lakes shoreline, since they can combine with other factors, such as storms, to cause serious flood and erosion damage. On the other hand, low water levels affect shipping, recreational boaters and hydroelectric power generation.

Yet, the fluctuation of Great Lakes water levels is not new. Ever since the retreat of the last ice glaciers from the Great Lakes region some 10,000 years ago, the water levels of the lakes have been fluctuating according to the prevailing climate over the region. Indeed, water level fluctuations are essential for the well being of much of the local marine and animal life.

PHYSICAL FEATURES

The Great Lakes have a water surface area of about 246,000 square kilometres. The area of the surrounding land and other smaller lakes draining into the Great Lakes is about 528,000 square kilometres (see Table 1).

The Great Lakes consist of Lakes Superior, Michigan, Huron, Erie and Ontario. They form a chain of reservoirs with each one draining to the next. Lake Superior is the uppermost lake and, the largest. It drains to Lake Huron by way of the St. Mary's River. Lake Michigan, located entirely in the United States, also drains to Lake Huron. The water levels of both Lake Michigan and Lake Huron are essentially at the same elevation since both lakes are connected by the wide and deep Straits of Mackinac.

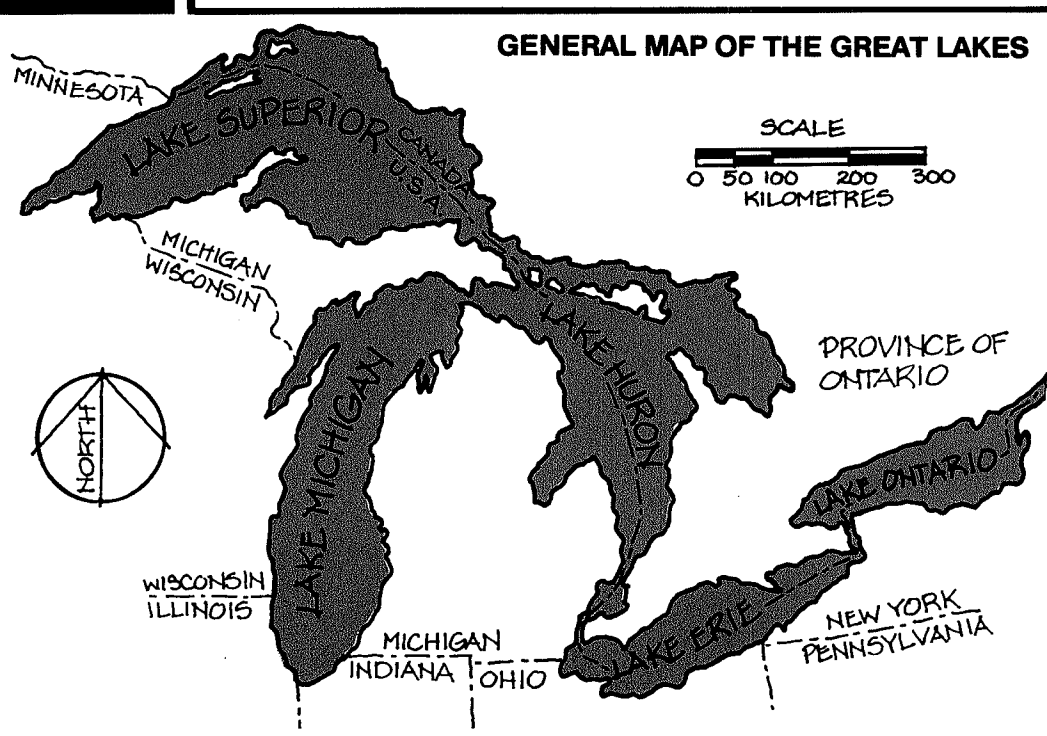

**TABLE 1.
PHYSICAL DIMENSIONS OF THE GREAT LAKES BASIN**


	Area (square kilometres)		Shoreline Length (3) (kilometres)	Water Volume (cubic kilometres)
	Land (2)	Water		
Lake Superior	127700	82100	4380	12100
St. Mary's River	2600	230	397	
Lake Michigan	118000	57800	2630	4920
Lake Huron	131300	59600	6160	3540
St. Clair River	3290	60	101	
Lake St. Clair	12430	1110	413	
Detroit River	2230	100	212	
Lake Erie	58800	25700	1400	484
Niagara River	3370	60	171	
Lake Ontario	60600	18960	1150	1640
St. Lawrence (1)	7190	610	1050	
Total	527510	246330	18064	22684

- (1) Measured from the outlet of Lake Ontario to Cornwall, Ontario/Massena, New York.
 (2) Land area includes other small lakes and rivers in the basin.
 (3) Including islands.

From Lake Huron, water flows to Lake Erie by way of the St. Clair River, Lake St. Clair and the Detroit River. Lake Erie is the shallowest of the five Great Lakes and second smallest in surface area. Its outflow is mainly through the Niagara River to Lake Ontario. Lake Ontario water in turn flows into the St. Lawrence River which carries the total outflow of the Great Lakes some 870 kilometres to the Gulf of St. Lawrence.

HYDROLOGY


The hydrologic cycle is a world-wide natural circulation system in which water evaporates from oceans, other large bodies of water (such as the Great Lakes) and land areas, condenses to form clouds, and is returned to the earth's surface as precipitation.

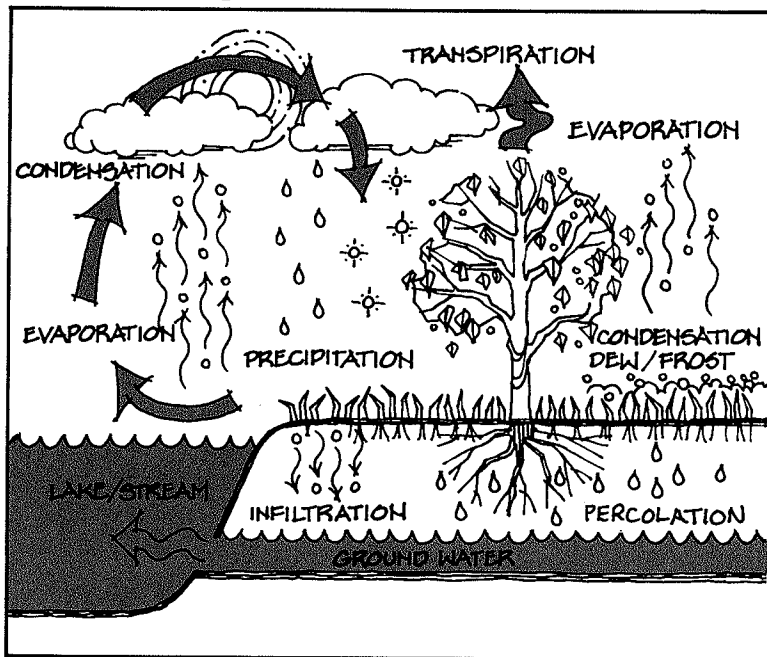


HYDROLOGIC CYCLE

Precipitation that falls over the Great Lakes provides a direct input to these water bodies. Precipitation in the form of rain or snow that falls over the basin may follow any number of courses. Snow that falls on the ground during the winter remains on the ground until the following spring. Snowmelt in the spring forms a major part of the total water supply to the lakes. Some of the precipitation will evaporate before it reaches the ground, while another

portion will drop on plants, buildings or pavement, and will evaporate directly. Of the large amount that reaches the ground, some will flow overland to streams while a portion will be stored in the soil near the surface and will eventually also evaporate. Part will be used by plants and then be returned to the atmosphere by transpiration. Another portion will become the ground water and eventually find its way to streams and lakes, re-appear at the surface in springs or travel through the ground to the ocean. Streamflow that enters the Great Lakes is often referred to as runoff. The various processes, such as precipitation and evaporation that make up the hydrologic cycle are never constant and can vary substantially from time to time. In fact, there have been extended periods of wet or dry years in the Great Lakes basin which were responsible for extremely high lake levels in the early 1970s and in 1986, or low water levels of the mid-1960s.

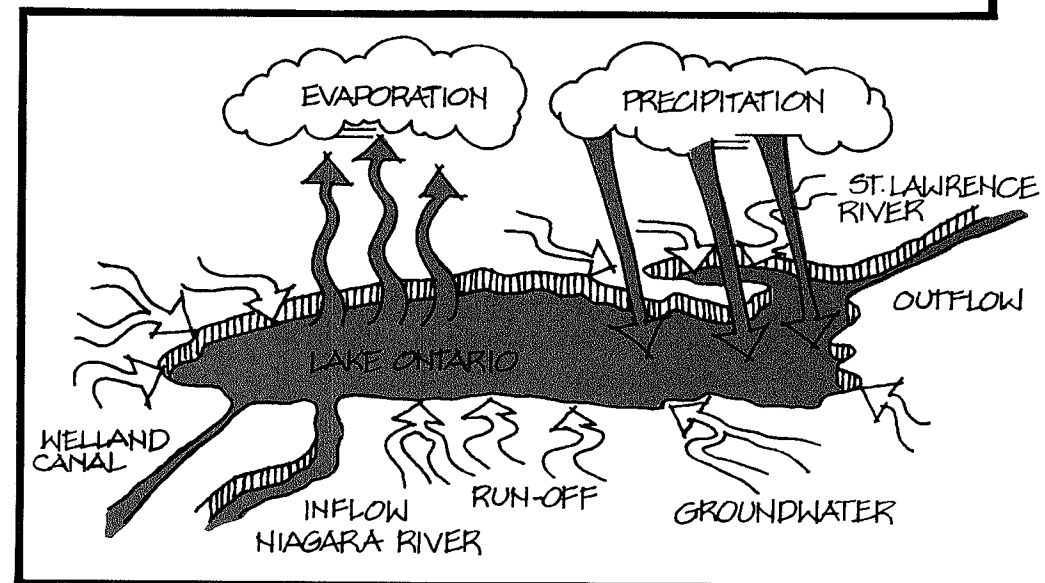

FACTORS AFFECTING LAKE ONTARIO LEVELS

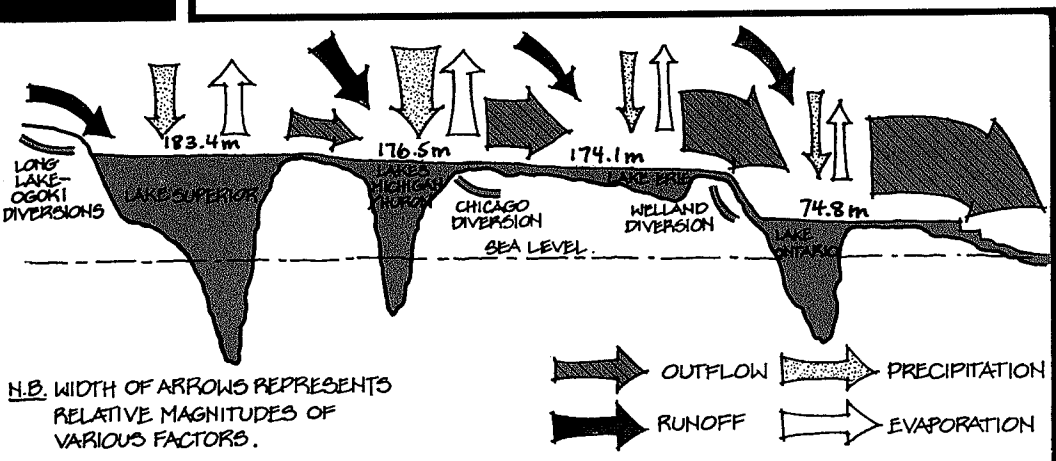

HYDROLOGY OF THE GREAT LAKES SYSTEM

The water level in each of the Great Lakes rises or falls according to the amount of water entering a lake and the amount leaving it. The amount entering a lake includes precipitation falling on the lake, runoff including snow-melt from the surrounding area, and ground water inflow.

TABLE 2.
SUMMARY OF HISTORICAL WATER SURFACE ELEVATIONS AND OUTFLOWS OF THE GREAT LAKES

	Water Surface Elevation (metres)	Outflows (cubic metres per second)		Water Surface Elevation (metres)	Outflows (cubic metres per second)
Lake Superior			Lake Erie		
Average	183.4	2150	Average	174.1	5860
Maximum	183.9	3600	Maximum	175.0	7810
Minimum	182.8	1160	Minimum	173.1	3340
Range	1.1	2440	Range	1.9	4470
Lakes Michigan/Huron			Lake Ontario		
Average	176.5	5180	Average	74.8	6880
Maximum	177.5	6740	Maximum	75.8	9910
Minimum	175.6	3000	Minimum	73.8	4360
Range	1.9	3740	Range	2.0	5550

(1) All figures are based on monthly values for the period 1900-1992.

(2) Water surface elevations shown here for each lake are based on the average of a number of water level recording instruments located on the lakes, and do not represent extreme high or low water levels experienced at any specific site.


(3) Elevations are measured in metres above mean sea level, IGLD (1985).

The water leaving a lake consists of evaporation from the lake's surface, ground water outflow and outflow at the lake outlet. Water levels will rise when the amount entering a lake exceeds the amount leaving it. This happens every spring. The converse is also true every fall and winter.

A lake's outflow depends on the elevation of the lake. The higher the lake level, the higher its outflow. Low lake levels will bring about low outflows. This self-regulating feature helps to keep levels on the lake within certain ranges.

Because of the large size of the Great Lakes and the limited discharge capacities of their outflow rivers, extremely high or low levels and flows sometimes persist for some considerable time after the factors which caused the extremes have changed.

Table 2 shows the magnitudes of the range of water level fluctuation and outflow that have been recorded. On the Great Lakes and along the St. Lawrence River, there are water level gauges which measure and record continuously the water surface elevations. Records in Canada are published annually by Environment Canada.

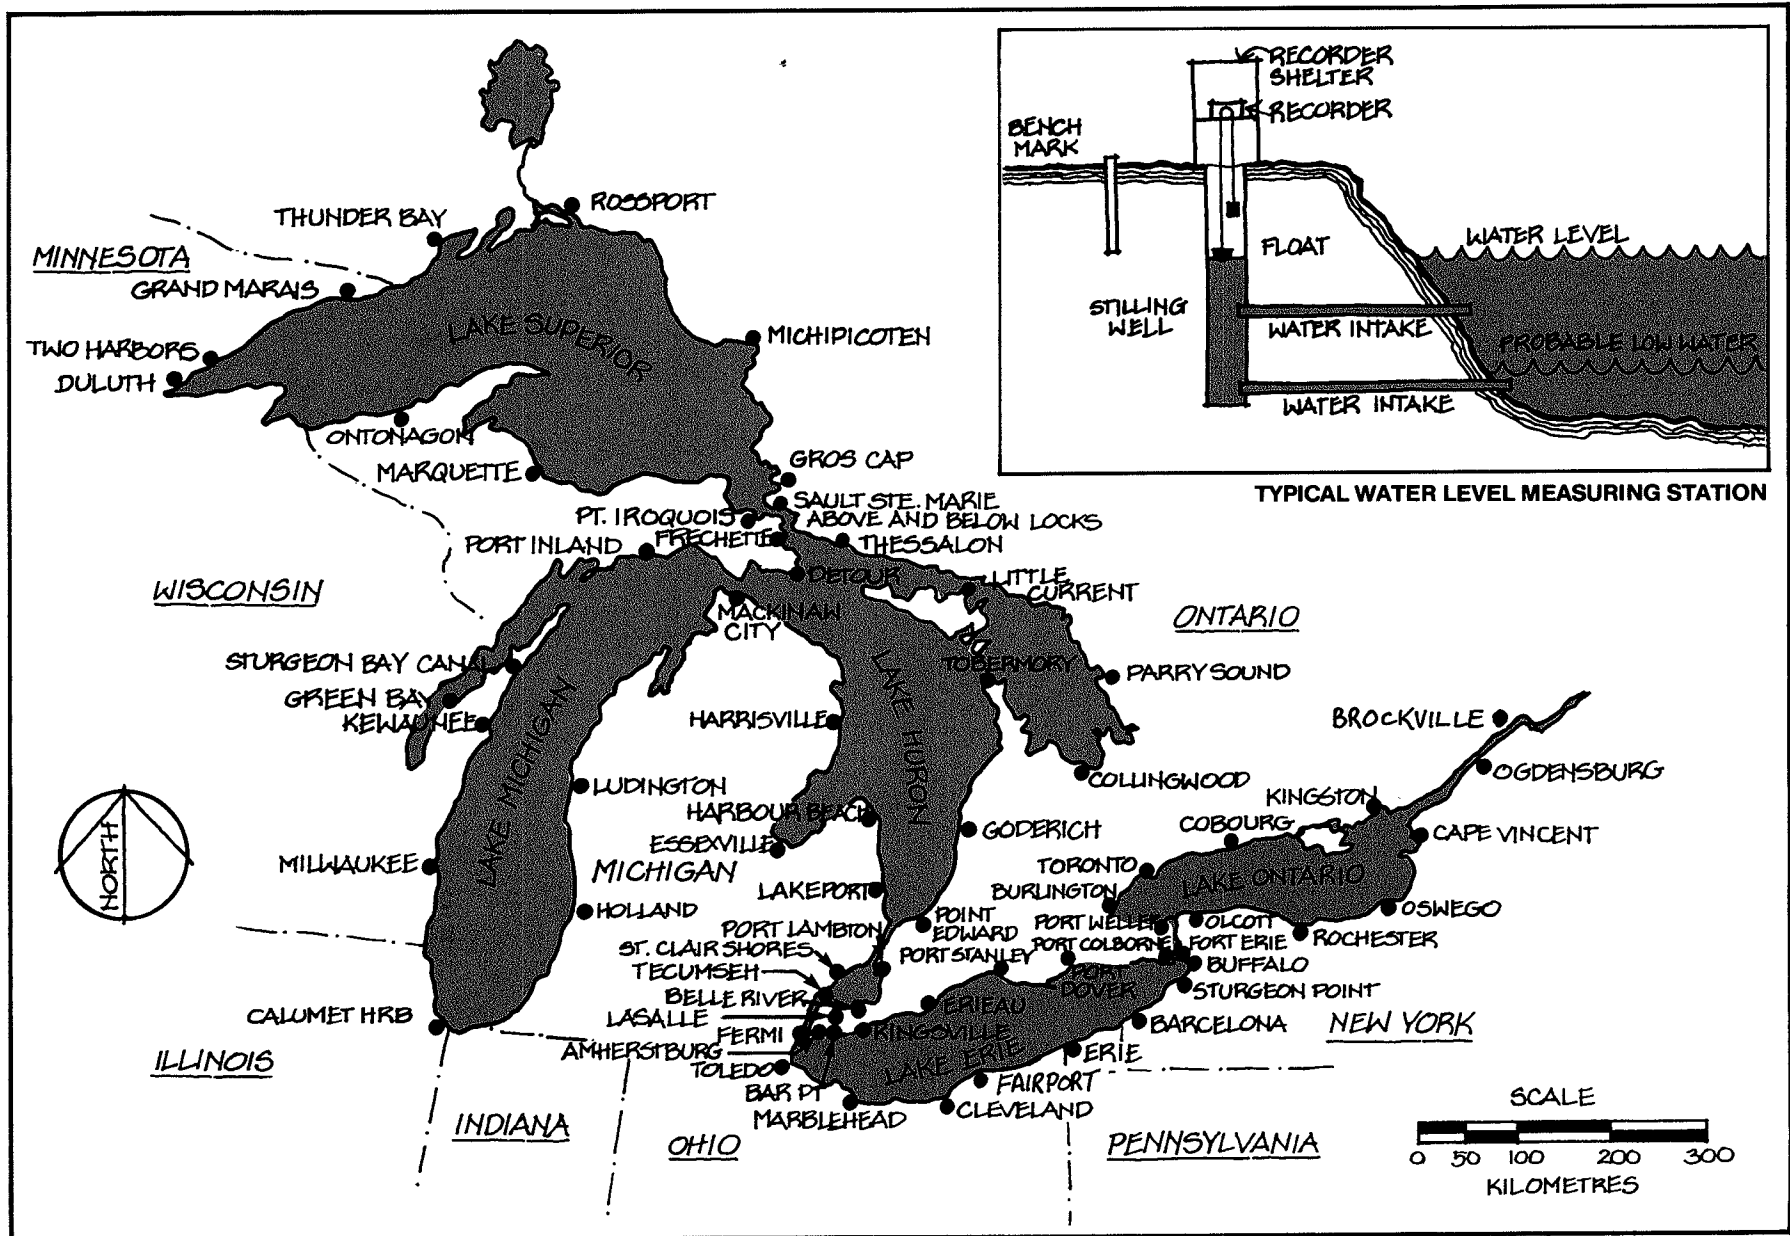

WATER LEVEL GAUGING STATIONS ON THE GREAT LAKES

FACTORS AFFECTING GREAT LAKES WATER LEVELS

Natural Factors


PRECIPITATION

Precipitation or lack of it is the main cause of long-term extreme fluctuations in lake levels. For example, in the early 1960's an extended period of below average precipitation brought about record low lake levels. In 1973 and 1985, high precipitation resulted in extreme high levels on the Great Lakes. A review of the past 100 years of water level records shows that no regular, predictable cycle between lows and highs exists. The intervals between high and low levels, and the durations of these highs and lows, can vary widely over a number of years.



EVAPORATION

Evaporation is least in the spring with condensation occurring at times when the lakes are cold relative to the air, and is greatest in the fall and early winter when the lake water is warm relative to the air temperatures. In one month up to 200 mm can evaporate from Lake Erie.

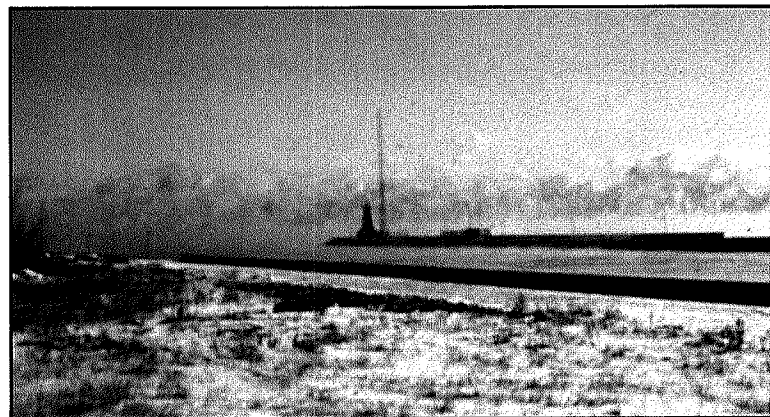

RUNOFF

In the spring, the snow on the lake's drainage basin melts and greatly increases the runoff into the lake.



This high inflow results in higher lake levels during the spring and early summer. The normal range from winter lows to summer highs is about 0.3 metre on Lakes Superior, Michigan and Huron and 0.5 metre on Lakes Erie and Ontario.

ICE RETARDATION

As the ice cover forms on the connecting rivers of the Great Lakes the flow is reduced because of the added surface friction and the reduction in channel cross-section area. If the ice cover breaks, ice jams can form, causing serious flooding upstream, ice damages along the shoreline, and greatly reduced flows downstream. Severe ice conditions in the St. Lawrence River can limit the amount of water that can be flowed out of Lake Ontario.

An ice jam in the St. Clair River occurred for some 26 days in April 1984, cutting the flow rate by up to 50%. During this period, the rise in level of Lakes Michigan and Huron was negligible due to their vast storage capacity.



However, the level of the much smaller Lake St. Clair fell as much as 0.6 metre.


AQUATIC GROWTH

Weeds or aquatic growth in the connecting rivers during the summer can reduce flow by the friction they introduce. In the Niagara River weeds reduce the flow by 3% on average.



METEOROLOGICAL DISTURBANCES


Another cause of lake level changes is wind. When strong winds continue to blow over a lake in one direction for a number of hours, they produce a surface tilt, referred to as 'wind set-up'. This wind set-up can cause the water level on eastern Lake Erie to rise over 2 metres on a temporary basis in less than a day.

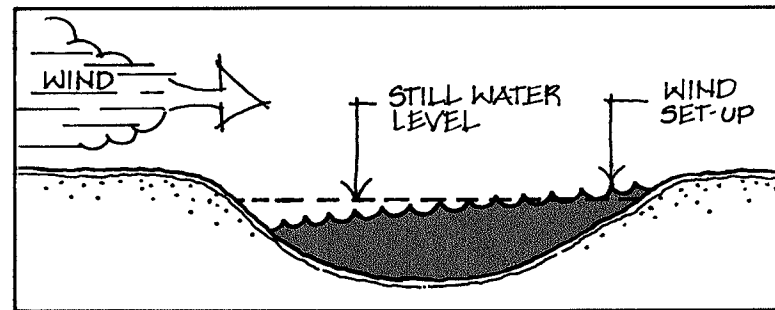

WIND SET-UP

CRUSTAL MOVEMENT

Crustal Movement, a vertical uplifting or rebounding of the earth's surface after the removal of the tremendous weight of glaciers, has occurred since glacial time. In the Great Lakes area the land to the north and east is rising faster than that to the south and west. For example, on Lake Ontario the eastern outlet end is rising with respect to the western inlet end at a rate of about 17 centimetres per century. The result is that the shore at the western end of the lake is experiencing a gradual increase in water level.


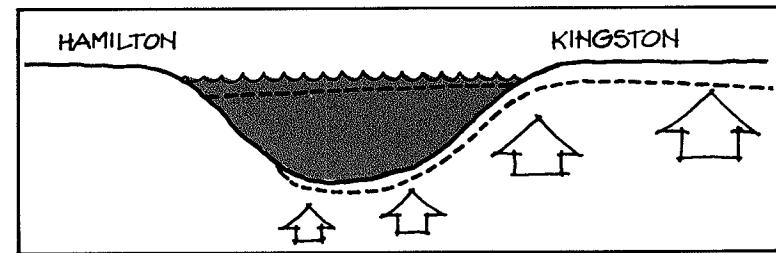


CRUSTAL MOVEMENT ON LAKE ONTARIO

Human Factors

DREDGING

Dredging is done primarily to maintain adequate depths in shipping lanes for navigation. Dredging in the St. Clair-Detroit River system has over the years lowered Lakes Michigan and Huron by up to 30 cm in some estimates.

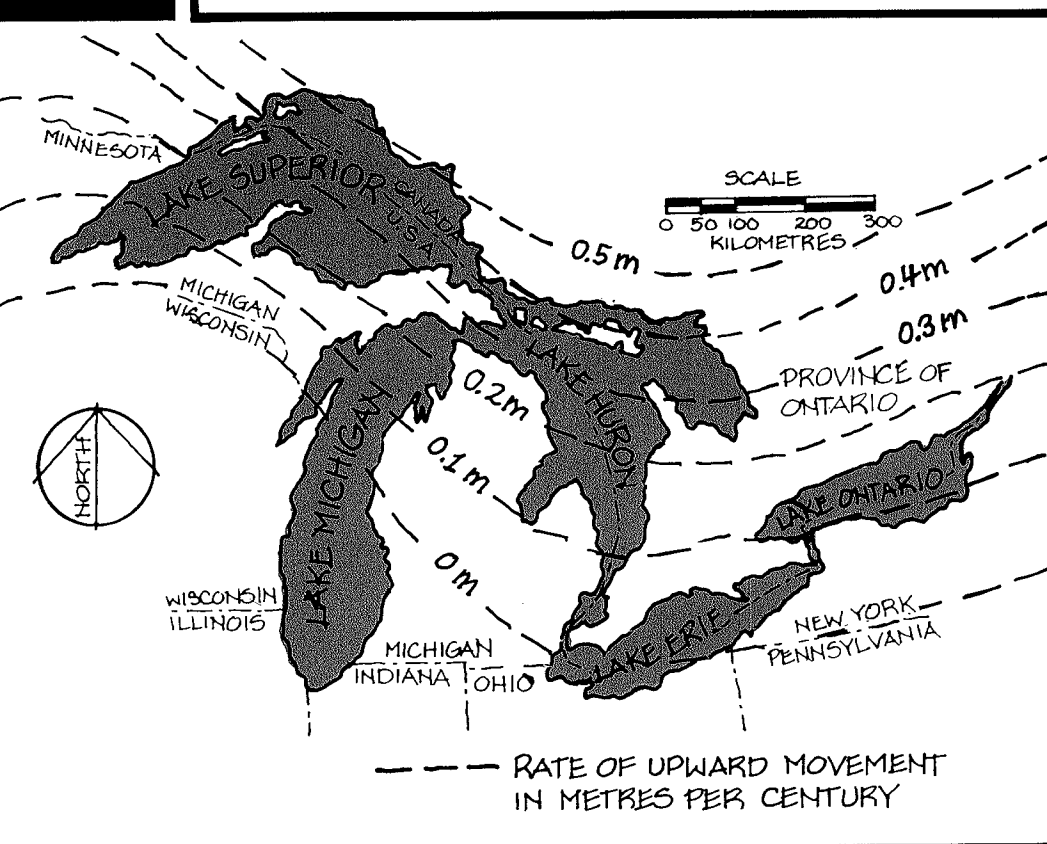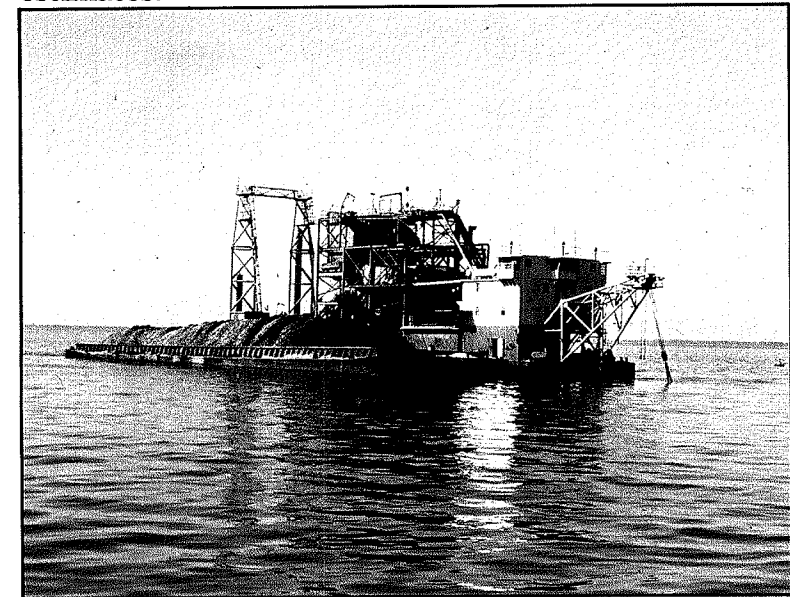

CRUSTAL MOVEMENT


DIVERSIONS

There are four locations on the Great Lakes where major diversions of water occur. Two of these, the Ogoki River and Long Lac diversions, flow southward into Lake Superior carrying a total of about 160 cubic metres of water per second, which would naturally flow northward into James Bay. At Chicago, water is withdrawn from Lake Michigan at a rate of 90 cubic metres per second for domestic and sanitation purposes. This water is discharged into the Mississippi River system and is lost to the Great Lakes basin. The Welland Canal diverts up to 270 cubic metres per second, at present, from Lake Erie to provide for commercial navigation between Lake Ontario and Lake Erie and to operate the Decew Falls power plant. To operate the New York State Barge Canal, about 30 cubic metres per second of water are taken out of the Niagara River at Tonawanda, New York during the navigation season and returned to Lake Ontario at several points. The effects of the New York State Barge Canal diversion on the water levels of the Great Lakes are negligible, owing to the relatively small amount of water diverted and the location of the diversion. The major diversion flows and their estimated long-term effects on lake levels are shown in the following table.

TABLE 3.
MAJOR DIVERSIONS AND THEIR EFFECTS (1) ON THE GREAT LAKES WATER LEVELS


	Long Lac and Ogoki	Chicago	Welland	Net Effect
Lake Superior	+0.06 metre	-0.02 metre	-0.02 metre	+0.02 metre
Lakes Michigan and Huron	+0.11 metre	-0.06 metre	-0.06 metre	-0.01
Lake Erie	+0.08 metre	-0.04 metre	-0.13 metre	-0.09 metre
Lake Ontario	+0.07 metre	-0.03 metre	negligible	+0.04 metre

Note: (1) Positive value means raising of the water levels.
Negative value means lowering of the water levels.
These values are calculated assuming Lake Superior and Lake Ontario regulation to be in effect.

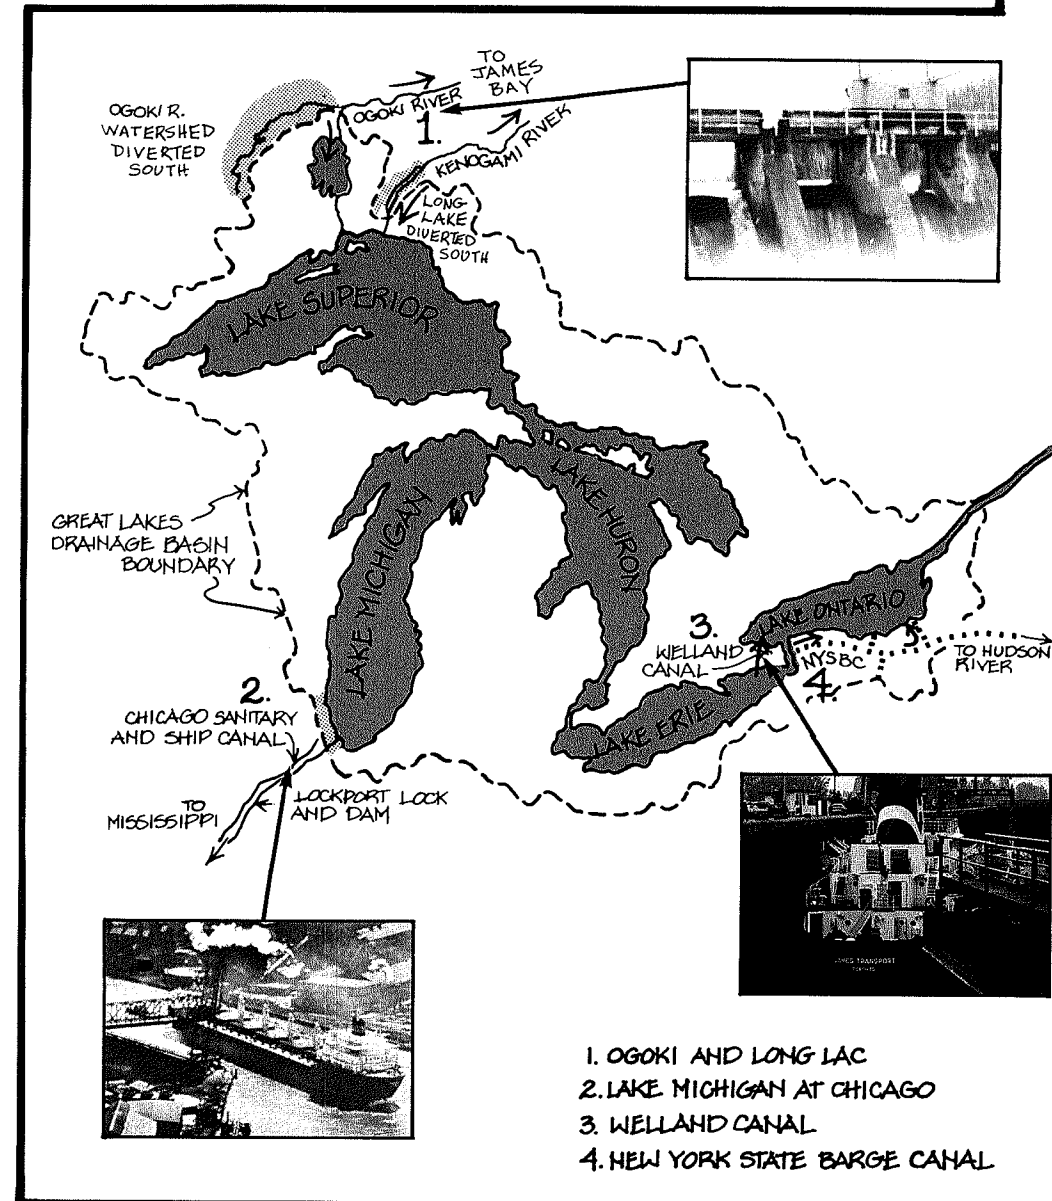


MAJOR DIVERSIONS ON THE GREAT LAKES






GREAT LAKES BASIN PRECIPITATION

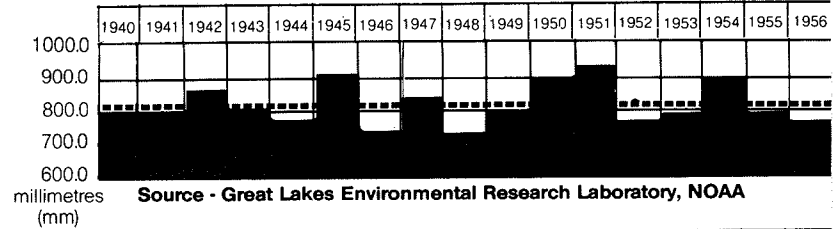

HYDROGRAPH OF GREAT LAKES WATER LEVELS

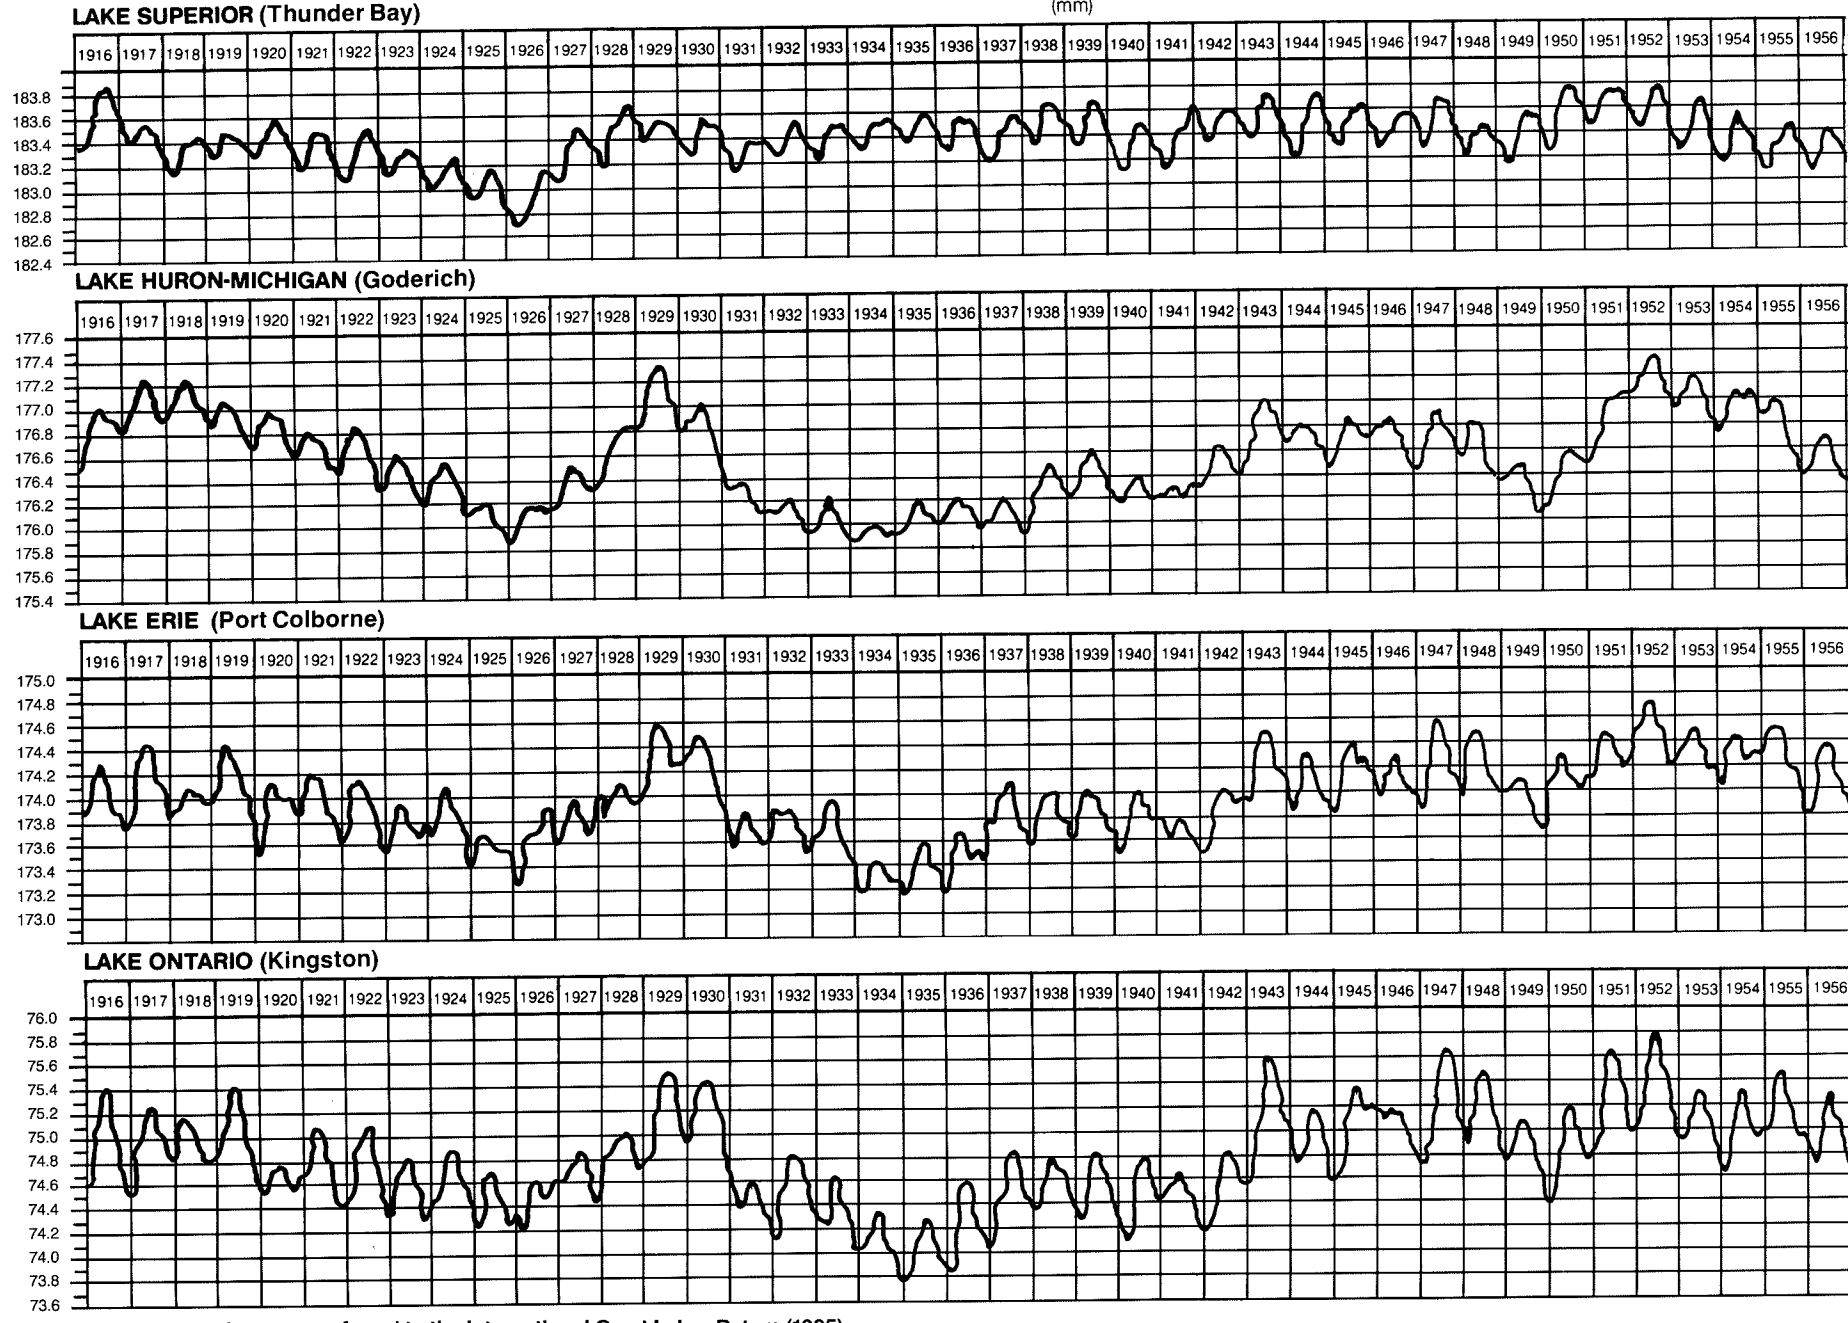

Elevations are in metres referred to the International Great Lakes Datum (1985)

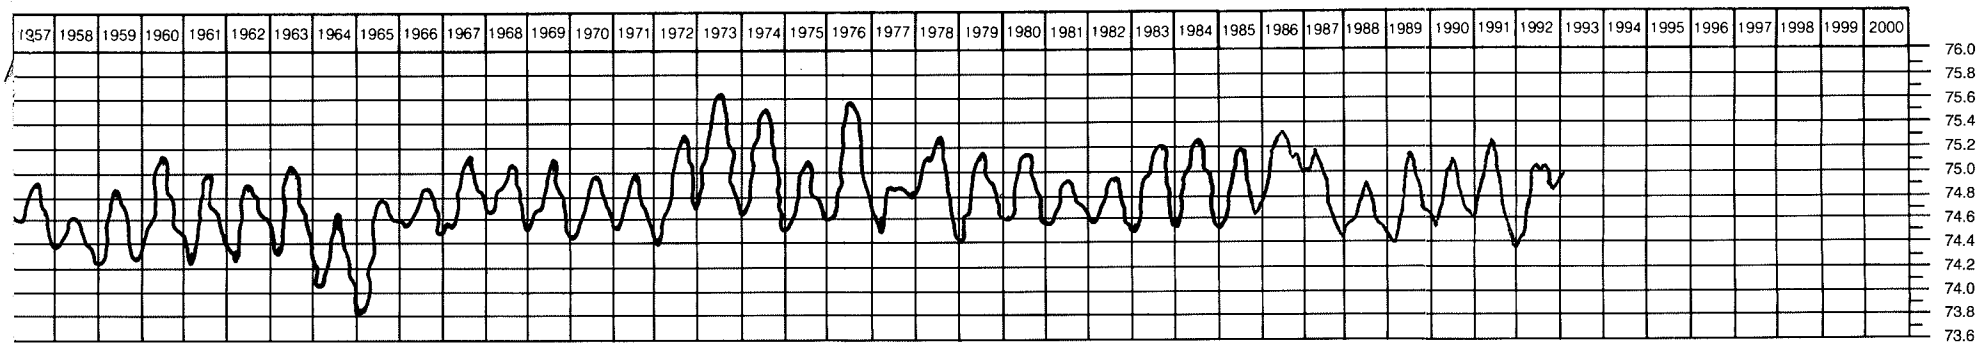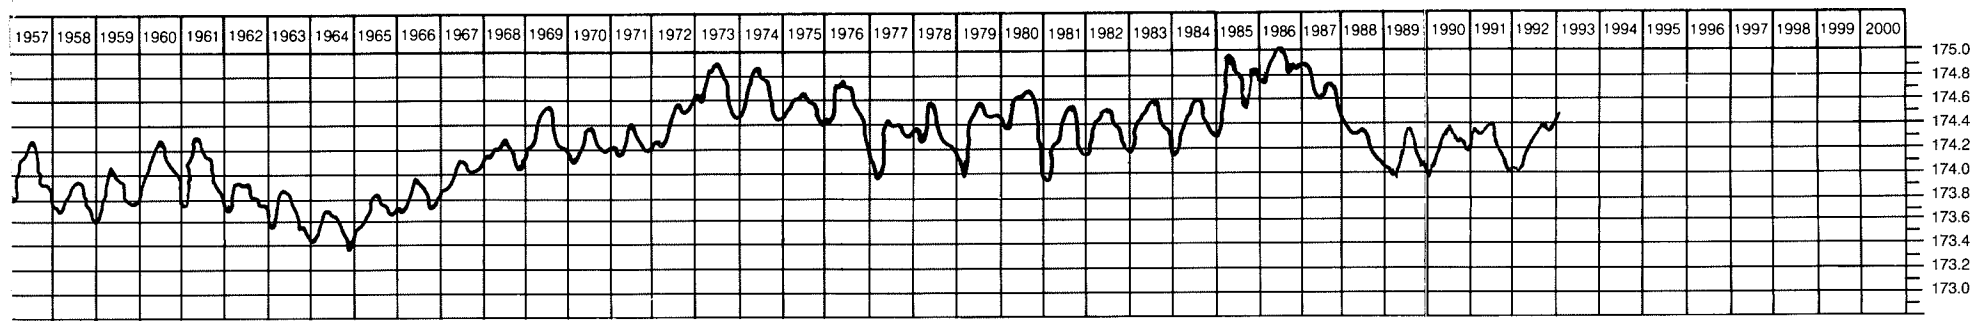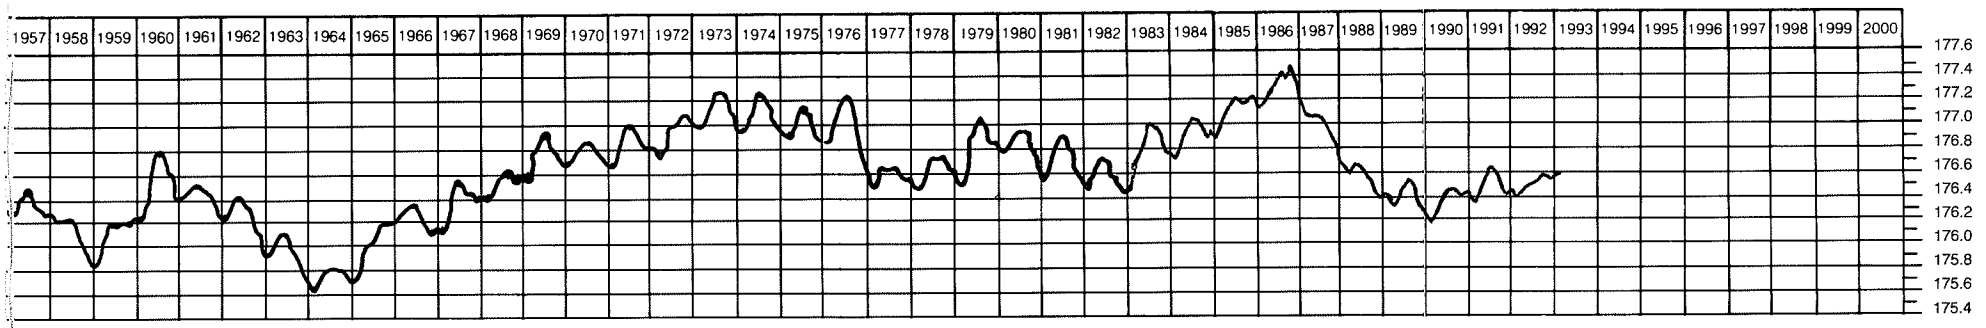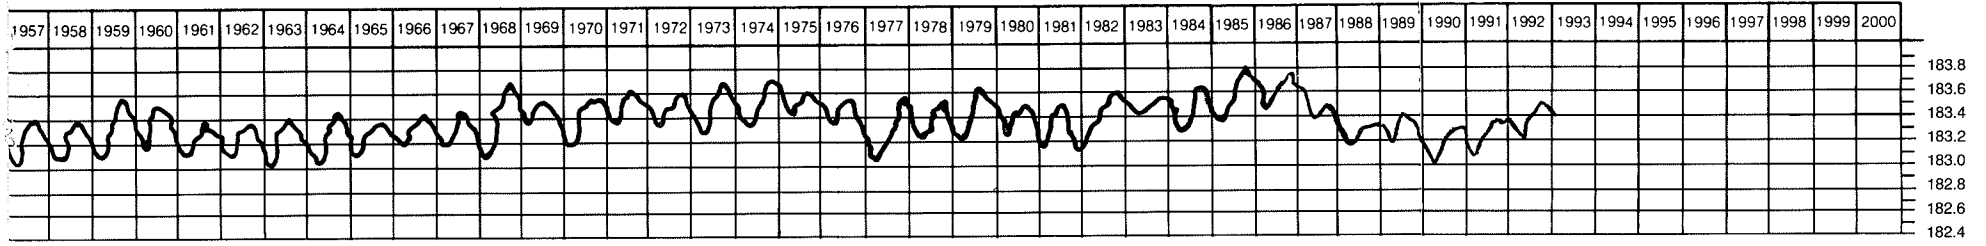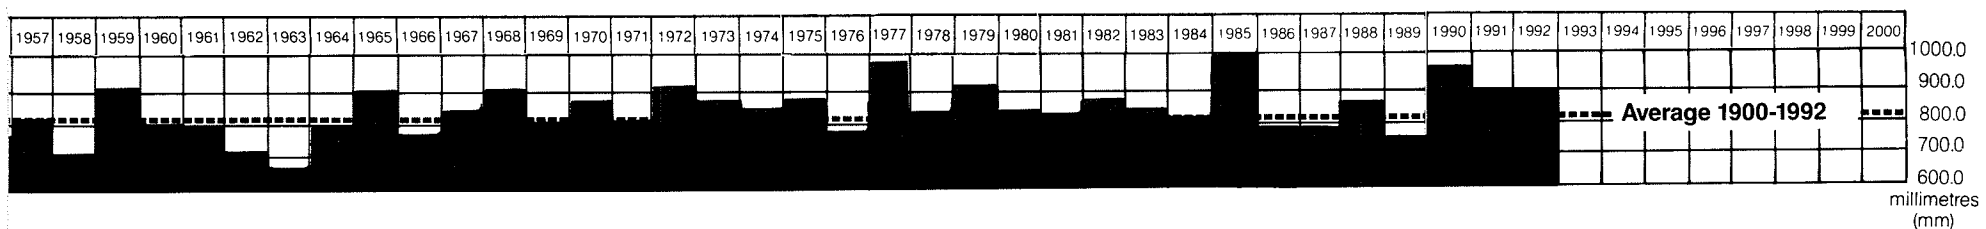

CONSUMPTIVE USES

Consumptive use is water that is withdrawn and not returned to the Great Lakes. Present consumptive uses total over 140 cubic metres per second on all the Lakes and this will increase rapidly in the future. The amount of consumptive use increases progressively through the Great Lakes system. Thus, the effect on water levels is least on Lake Superior, and greatest on Lake Ontario.

Consumptive use of water lowers Great Lakes levels and reduces their outflows. This subject is of concern to both Canada and the United States because of adverse

economic and environmental impacts associated with progressively lower lake levels.

REGULATION


Of all the human factors affecting lake levels, artificial control or regulation of lake outflows is by far the most dominant. To regulate a lake means to adjust or modify its outflows according to certain rules in order to bring about more desirable lake levels or outflows. Yet, regulation too has its limitations and cannot always be relied upon for desirable water levels. Regulation takes place on Lake Superior and Lake Ontario.

Two steps are taken before regulation can take place:


- (1) enlargement of the outlet river so that at times more water can be released; and
- (2) installation of structures capable of reducing the outflows when required. The procedures in Great Lakes regulation are established by the International Joint Commission – a bilateral body set up by Canada and the United States to seek solutions to water problems along their International Boundary.

The outflow from Lake Superior to the St. Mary's River has been completely regulated or controlled since 1921 at Sault Ste. Marie, using various control structures, seaway navigation locks and hydro power installations.

Present regulation procedure calls for outflows that maintain a desirable water level on both upstream (Lake Superior) and downstream (Lakes Michigan and Huron).

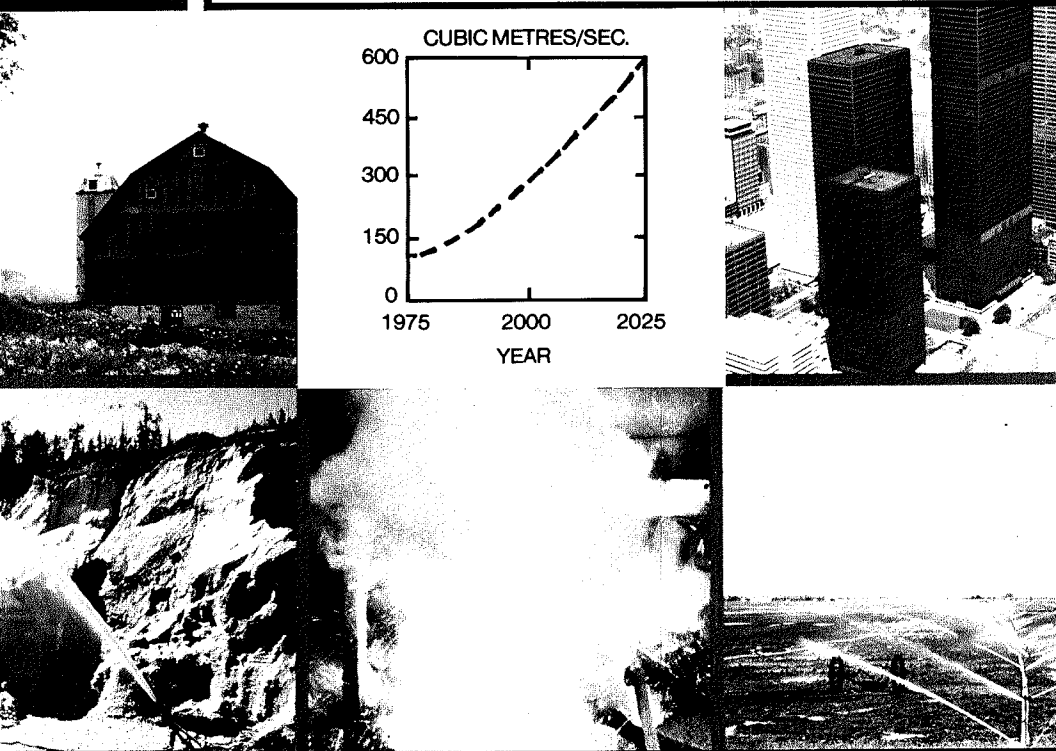


CONSUMPTIVE USES

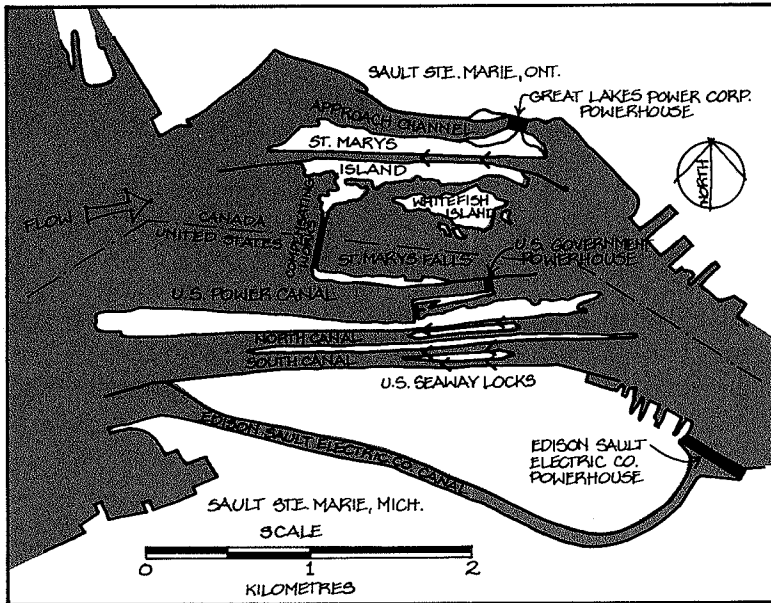

FACILITIES AT SAULT STE. MARIE

Since the completion of the St. Lawrence Seaway and Power Project in 1958, the outflow from Lake Ontario has been regulated. The regulation of Lake Ontario has a similar objective to that of Lake Superior, which is to keep the lake level near its long-term average and to reduce the total range of fluctuation. The enlargement of the St. Lawrence River by dredging during construction of the Power and Seaway Project has made it possible to increase Lake Ontario's outflows. The benefits of Lake Ontario regulation can best be illustrated by comparing the water levels during 1986 with those that would have occurred if there had been no regulation.


Regulation has another benefit in that it can raise water levels when the basin experiences periods of low precipitation, and in the case of Lake Ontario, below average inflows from the upper lakes.

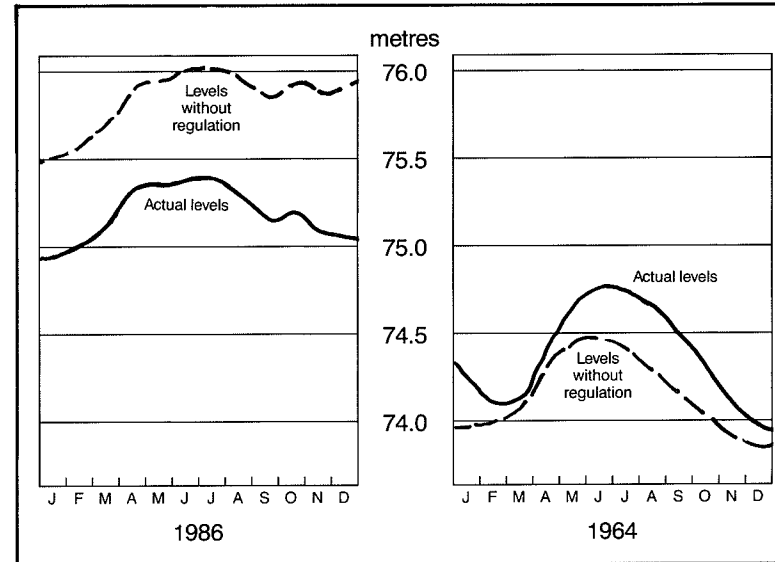

LAKE ONTARIO LEVELS WITH AND WITHOUT REGULATION

The construction of the Moses-Saunders Power Dam and other regulatory works in the St. Lawrence River allow Lake Ontario outflows to be reduced when Lake Ontario levels are low or when flood conditions are occurring downstream at Montreal. These works are also used to maintain adequate depth for safe navigation in the St. Lawrence River.

The highest recorded water supplies to Lake Ontario could raise the water level by 0.3 metre in one month, even with maximum flow down the St. Lawrence River. However, high Lake Ontario outflows are not always

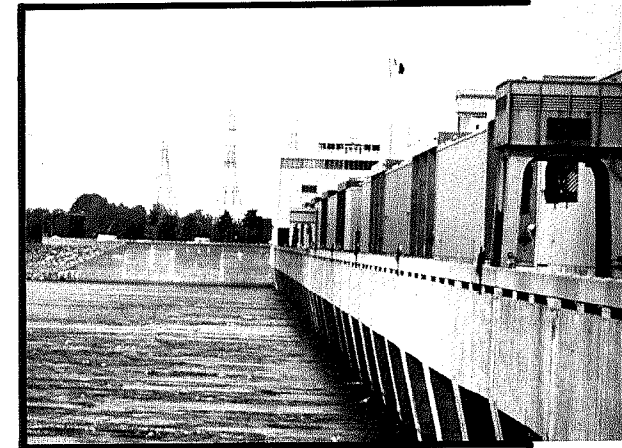


achievable nor allowable because high outflows, occurring simultaneously with high flows in the Ottawa River, can cause very serious flood problems in Montreal and further downstream on the St. Lawrence River. High flows during the fall can be hazardous to navigation, whereas flows too high in the winter can break up the ice covers in the St. Lawrence River leading to ice jams.

EFFECTS OF WATER LEVEL FLUCTUATIONS

ENVIRONMENTAL EFFECTS

Water level fluctuations are not necessarily bad. In fact, they form a process which is natural to the fish and wildlife inhabiting the Great Lakes. Extreme or extended periods of high and low water levels, however, can compound the effects of natural lake processes and cause undesirable results. Low water levels or flows, for example, can aggravate pollution problems in the Great Lakes by reducing their dilution capacity.

Wetlands require fluctuating lake levels to enhance their productivity. Periodic flooding is necessary to maintain a variety of plant communities at different stages and thereby the wetland's ability to support a diversity of fish and wildlife species.

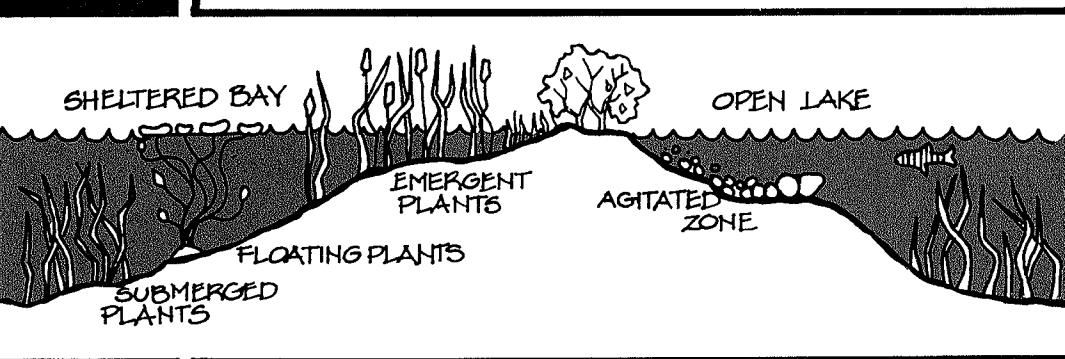


Long-term lake level fluctuations, on the other hand, generally produce plant community shifts:

Low water conditions generate an invasion of sedge/meadow plants by shrubs, a displacement of emergent vegetation by sedge/meadow and result in less open water and associated aquatic communities.




High water conditions result in increased open water aquatics, as other communities decrease.

Shallow water environments provide important spawning, nursery and feeding grounds which are essential for the maintenance of fish stocks. High lake levels provide more favourable fish habitats whereas low levels could dry up spawning and feeding grounds.

NAVIGATION

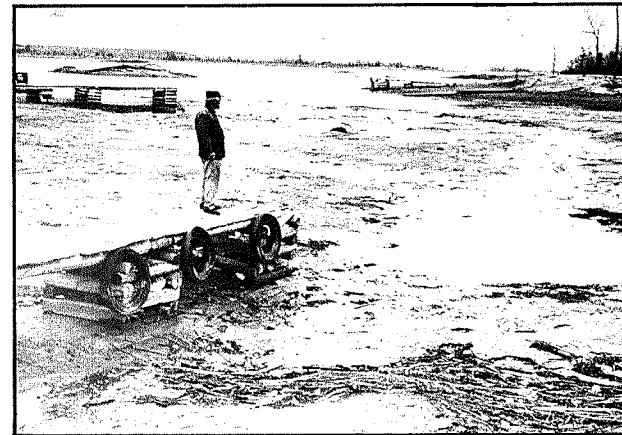

Recreational boating facilities are sensitive to fluctuating levels. Docks can be inundated or left high and dry.

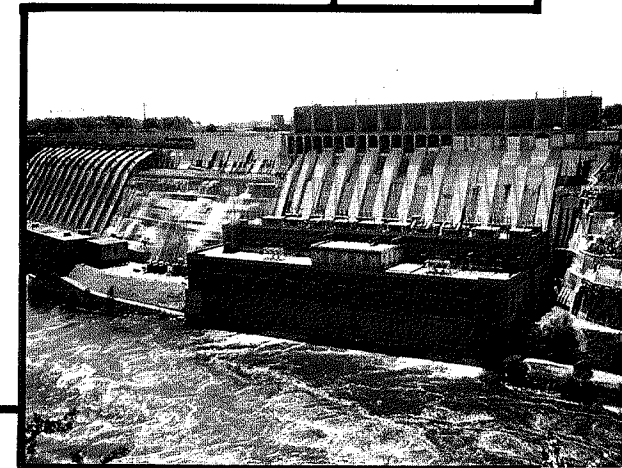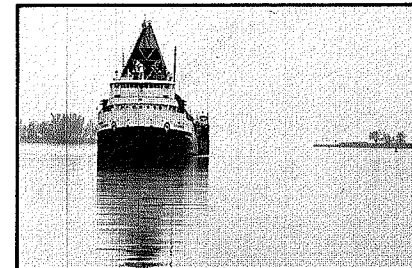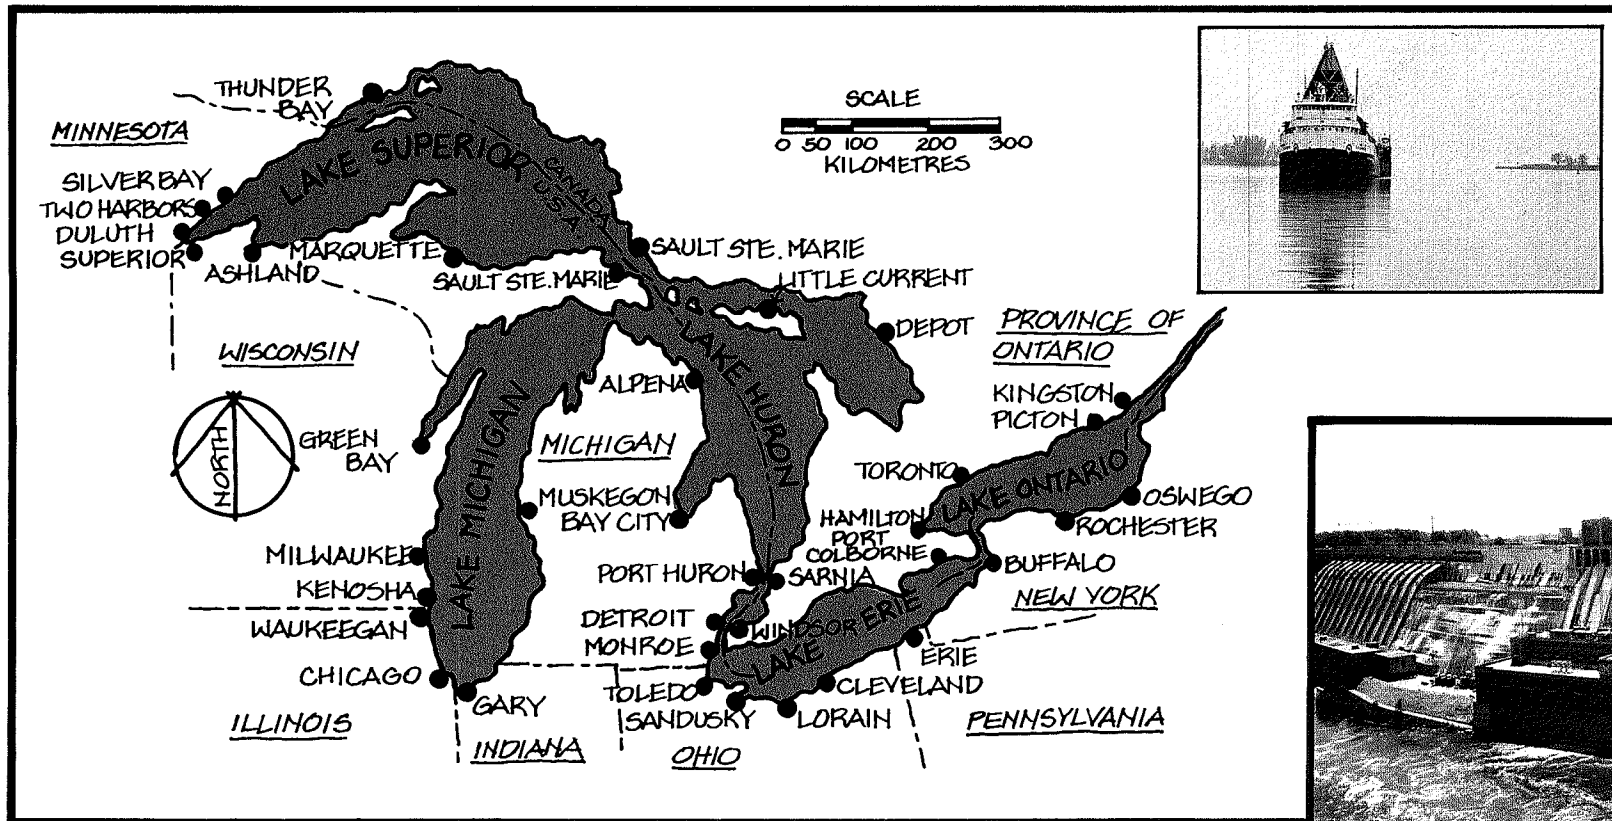

MAJOR PORTS ON THE GREAT LAKES

The Great Lakes - St. Lawrence River navigation system provides the means of transporting over 200 million tonnes of waterborne freight annually. About 85% of the cargo consists of iron ore, coal, limestone and grain. The remaining 15% includes petroleum products, newsprint, rock salt, iron and steel products, cement and chemicals and overseas general cargo trades.


Low lake levels can reduce the available vessel draft and thus the capacity to carry loads, thereby increasing the cost of transportation and necessitating costly dredging.

HYDRO - ELECTRIC POWER

Major hydro-electric power generating facilities are located on the Niagara, St. Lawrence and the St. Mary's Rivers. These facilities use water from the rivers to generate electric power.

High lake levels bring about high river flows which increase power generation, while low flows cause reductions in power generation. Electric utilities use coal, oil, natural gas or nuclear thermal power plants to supplement the power produced by the hydro plants.

SHORE EROSION AND FLOODING

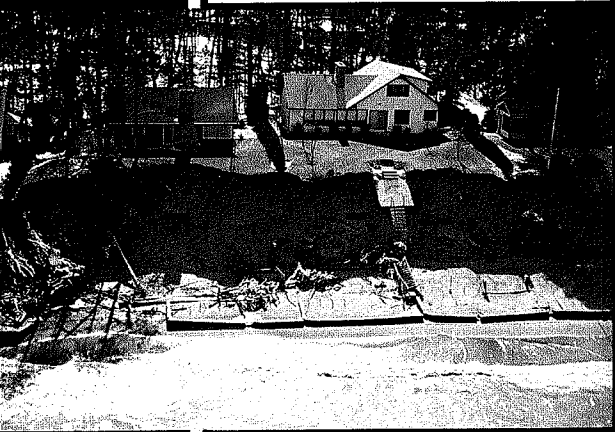

Shore erosion is caused principally by storm induced waves and associated currents along the shoreline. The problem can be compounded by high lake levels.


The Great Lakes shoreline characteristics range from extreme flat lowland areas, highly susceptible to flooding (such as the St. Clair Flats), to high bluff areas, some of which are highly erodible. A major use of the

Great Lakes coastal land is for residential purposes. Other uses include industry, recreation, parks, beaches, boating


facilities and forest preserves. All these areas are affected by fluctuating lake levels. Residential areas incur most of the damage from storms due to their relatively high investment value and a tendency to build close to a bluff edge or on low flat shorelines.

Flooding and erosion are natural processes. However, they represent continuing problems in the Great Lakes, compounded by mismanagement of shorelands. Floods and erosion can cause extensive damage. Ignoring the reality of Great Lakes water level fluctuation, high water levels and storms in the future could lead to more damages because of high erosion rates, flood susceptibility and structures built too close to the shore.

In 1972-73, record high water levels in the Great Lakes caused extensive shore property damages. The Government of Canada and Ontario surveyed the shoreline and subse-

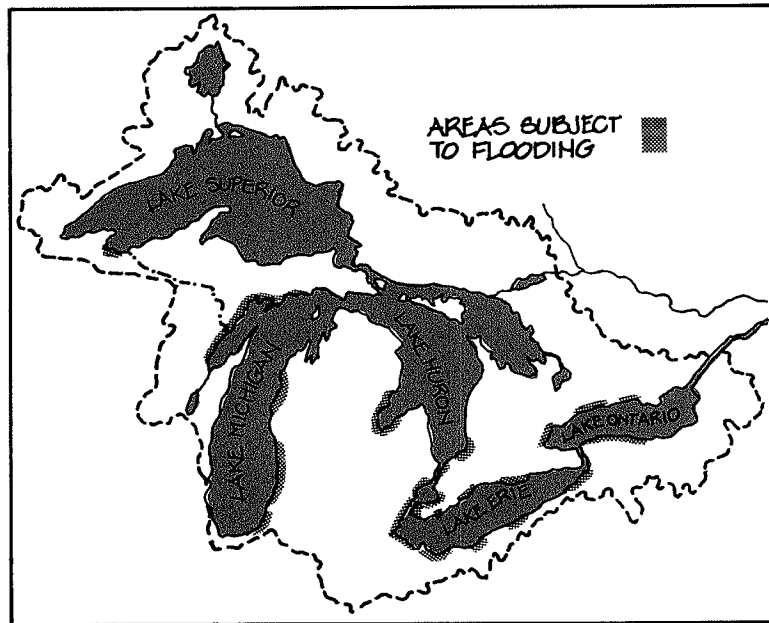

GREAT LAKES SHORELINE SUSCEPTIBLE TO FLOODING

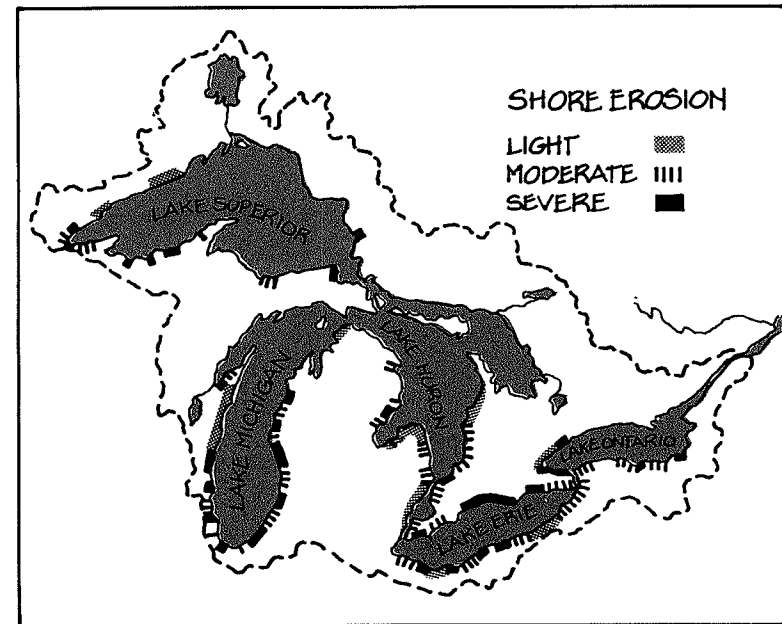

GREAT LAKES SHORELINE SUSCEPTIBLE TO EROSION

quently prepared a report compiling details of areas where flood and erosion risk are highest and recommended how future damage might be reduced. A similar study, completed in 1992, identified those areas of shoreline where the rate of recession is particularly sensitive to changes in water level. Reports from several recent international and federal-provincial studies also concluded that the best way to reduce future flood and erosion losses is to control future shoreline development.

If you are planning to purchase shore property and would like to be aware of its potential hazards, or if you own property on the shore and are seeking advice on how to deal with flooding and erosion problems, several booklets and pamphlets are available. A list of these can be found in the reference section of this brochure.



SOME QUESTIONS AND ANSWERS

Question: Can improvement in the present methods of Lake Superior and Lake Ontario regulation further reduce flood and erosion damage to the Great Lakes?

Answer: To a large extent no because the capacities of the Great Lakes outlet channels limit the amount of outflows that can be released. Any further increase or reduction in outflow can only be possible with major and costly channel enlargements and modifications to some of the control structures. In addition, recent studies have shown that most types of shoreline continue to erode to varying degrees regardless of changes in lake level regimes.

Reduction in the range of water levels on the Great Lakes might be possible if more accurate long-term weather forecasts were available. But such forecasts are still not possible at this time. Research efforts are continuing on weather forecasting procedures and hydrologic modelling.

Question: Can manipulation of the existing major diversions in the Great Lakes alleviate the problems of extreme high and low water levels?

Answer: Alteration of existing major diversions, such as the Long Lac, Ogoki, Chicago and Welland Canal diversions, has been a subject of debate in the past whenever lake levels are high or low. Aside from the very limited impact on the Great Lakes, such alterations have other implications that must be considered.

For example, if the existing Long Lac and Ogoki diversions were stopped, and both the Chicago and Welland Canal diversions were increased to about 250 cubic metres per second each, Lake Superior would be lowered by approximately 5 cm, Lakes Michigan and Huron by 11 cm, Lake Erie by 9 cm, and Lake Ontario by 5 cm. It will take at least one year for the effects of these alterations to be felt on Lake Ontario; and the variability of the climate of the

basin makes such action highly questionable.

Such actions would also have side effects on the environment, the economy, and on the lives of people who live in the immediate areas of the diversions. For example, redirecting the Long Lac and Ogoki water northward could cause flooding in Native communities, while an increase in the Chicago Diversion could have adverse effects on people and industry downstream on the Illinois waterway. Reduced river flow at Niagara and in the St. Lawrence River would adversely affect commercial and recreational navigation, as well as hydro power generation. Examination of the potential side effects of such actions would be required before adjustments were made.

Question: Can the other Great Lakes be regulated?

Answer: The possibilities of regulating the water levels of Lakes Michigan, Huron and Erie were examined in three international studies completed since 1973. The most recent, completed in March of 1993, agrees with the conclusion drawn in the other two, that the costs of further regulating the Great Lakes would exceed the benefits. The most recent study also concludes that a reduction in the range of water levels on the middle three lakes would adversely affect the health of wetlands, which depend on changes in levels to maintain species diversity. This study also concluded that the wetlands of Lake Ontario have already been adversely affected by existing regulation due to the reduced range of fluctuations of water levels.

Question: Why was Lake Ontario water level so high in early 1993 even though there was regulation in place?

Answer: Lake Ontario levels in early 1993 were high because of the high precipitation that had fallen on the drainage basin since July of 1992, and the very high inflow from Lake Erie. Although the St. Lawrence River has been enlarged, the river still has a limited capacity. The severe

ice conditions in the river during the winter also limited the flow carrying capacity of the river.

Question: Can the structure, which is located partly across the river above Niagara Falls, be used to regulate the water levels of Lake Erie?

Answer: This structure controls the distribution of river flow between the hydro-electric power plants in each country and the flow over the Niagara Falls for purposes of the 1950 Niagara River Treaty between Canada and the United States. Studies and tests in the past have found that the operation of this control structure has only an extremely small effect on the outflows of Lake Erie and hence, it would not be effective to regulate Lake Erie's level.

Question: What can one expect of the "Greenhouse Effect" on lake levels?

Answer: The "Greenhouse Effect", caused by an increase of carbon dioxide and equivalent gases in the earth's atmosphere, is the subject of intense study by scientists around the world. While opinions vary on the effects this phenomenon will have on the Great Lakes, the most advanced computer models currently indicate that water supplies to the Great Lakes-St. Lawrence River basin could be dramatically reduced in the next century. Lake Superior's level could drop by as much as one-third of a metre, and the other lakes' levels could be reduced by between 1.2 and 1.5 metres. St. Lawrence River flows at Montreal could be reduced by as much as 40%. The effects of reduced water supply are more dramatic farther downstream in the system, because they accumulate as the effects of reduced water supplies are carried through the system. However, these results should be regarded as simulations of conditions that could occur if specific climate change scenarios happen as currently projected. They should not be considered as predictions.

INTERNATIONAL GREAT LAKES DATUM (IGLD) 1985

The International Great Lakes Datum (IGLD) 1985 is a new vertical reference to measure water levels in the Great Lakes-St. Lawrence River. This new datum, IGLD 1985, which went into effect on January 1, 1992, replaces IGLD 1955.

The reason for establishing the new datum is the gradual movement of the earth's surface or crust in the Great Lakes basin area due to Isostatic rebound. Isostatic rebound is the gradual rising or bouncing back of the earth's crust from the weight of the glaciers that once covered the Great Lakes region. This movement is very gradual and has been occurring since the retreat of the glaciers. As a result, the datum or vertical reference must be adjusted every 25 to 35 years.

The most significant change between IGLD (1955) and IGLD (1985) is the elevations assigned to water levels. The low water datum or chart datum on nautical charts for the Great Lakes and connecting channels has not changed. The depths shown on these nautical charts has not changed. However, the elevation assigned to chart datum has a different value on IGLD 1985 compared to IGLD 1955 (see Table 4).


The method of regulating Lake Superior and Lake Ontario outflows has not been affected by the implementation of IGLD 1985. The range of levels within which the lakes are regulated has been assigned new elevations, but the ranges remain the same with respect to their position with the shoreline and navigation depths.

TABLE 4.
LOW WATER (CHART) DATUM FOR IGLD 1955 AND
IGLD 1985

Low Water Datum (or Chart Datum) in metres		
	<u>IGLD 55</u>	<u>IGLD 85</u>
Lake Superior	182.9	183.2
Lake Michigan	175.8	176.0
Lake Huron	175.8	176.0
Lake St. Clair	174.2	174.4
Lake Erie	173.3	173.5
Lake Ontario	74.0	74.2

FORECAST OF GREAT LAKES WATER LEVELS – A LOOK AT THE FUTURE

The Monthly Water Level Bulletin, published by the Department of Fisheries and Oceans in cooperation with Environment Canada, includes a six-month forecast of Great Lakes water levels. These forecasts are presented as the probable levels based on certain assumed hydrologic conditions over the six-month forecast period. During the recreational boating season, Environment Canada also issues monthly forecasts of water level conditions for locations between Lake Ontario and Lake St. Louis on the St. Lawrence River.



Water Levels Niveaux de l'eau

Great Lakes and Montreal Harbour


Monthly Bulletin prepared by the
Canadian Hydrographic Service
Department of Fisheries and Oceans

Grands Lacs et port de Montréal

Bulletin mensuel préparé par le
Service hydrographique du Canada
Ministère des Pêches et des Océans

Thunder Bay

December 1992 Décembre



High Water Level Advisory

High rainfall in recent months have increased the levels of Lake Ontario and Lake Erie. Readers are advised that a potential for flooding exists for the next several months.

Avis du niveau d'eau élevé

Lors des derniers mois, les chutes de pluies abondantes ont élevées les niveaux d'eau des Lacs Ontario et Érié. Soyez avisé qu'une possibilité d'inondation existe pour les prochains mois.

Copies of the Monthly Water Level Bulletin can be obtained by writing to:

Canadian Hydrographic Service
Canada Centre for Inland Waters
867 Lakeshore Road
P.O. Box 5050
Burlington, Ontario
L7R 4A6

Copies of the St. Lawrence River levels forecast and additional information on the subjects covered in this brochure can be obtained from:

Water Planning and Management Branch
Inland Waters Directorate
867 Lakeshore Road
P.O. Box 5050
Burlington, Ontario
L7R 4A6

CONVERSION TABLE

Metric to British Units (approximation only)

1 cubic metre per second = 35.31 cubic feet per second

1 metre = 3.28 feet

1 kilometre = 0.621 mile

1 kilogram = 2.2 pounds

1 square kilometre = 0.386 square mile

1 cubic kilometre = 0.240 cubic mile

1 litre = 0.22 gallon (Imperial)

REFERENCES

1. THE CLIMATE OF THE GREAT LAKES BASIN. C.W. Phillips and J.A.W. McCulloch, Toronto, 1972.
2. COPING WITH THE GREAT LAKES. Fisheries and Environment, Canada and Ontario Ministry of Natural Resources, 1978.
3. FURTHER REGULATION OF THE GREAT LAKES. International Joint Commission, Washington, D.C., and Ottawa, Canada, 1976.
4. THE GEOLOGY OF THE GREAT LAKES. J.L. Hough, University of Illinois Press, 1958.
5. THE GREAT LAKES. Walter Massey Tovell, Royal Ontario Museum, 1979.
6. GREAT LAKES DIVERSIONS AND CONSUMPTIVE USES. Report to the International Joint Commission by the International Great Lakes Diversion and Consumptive Uses Study Board, 1981.
7. GREAT LAKES FLOOD AND EROSION PRONE AREA MAPS. Fisheries and Environment Canada and Ontario Ministry of Natural Resources, 1978.
8. GREAT LAKES-ST. LAWRENCE RIVER REGULATION, What it Means and How it Works. Environment Canada and U.S. Army Corps of Engineers, 1990.
9. GREAT LAKES SHORE DAMAGE SURVEY TECHNICAL REPORT. Fisheries and Environment Canada and Ontario Ministry of Natural Resources, 1975.
10. GREAT LAKES WATER LEVELS, 1860-1980. National Ocean Survey, National Oceanic and Atmospheric Administration, United States Department of Commerce.
11. HISTORICAL STREAMFLOW SUMMARY — Ontario to 1982. Water Survey of Canada, Environment Canada, 1983.
12. IGLD 1985, Brochure on the International Great Lakes Datum 1985. Coordinating Committee on Great Lakes Basic Hydraulic and Hydrologic Data, 1992.
13. INTERIM REPORT ON 1985-86 HIGH WATER LEVELS IN THE GREAT LAKES-ST. LAWRENCE RIVER BASIN. International Joint Commission, Washington, D.C., and Ottawa, Canada, 1988.
14. LAKE ERIE WATER LEVEL STUDY. Report to the International Joint Commission by the International Lake Erie Regulation Study Board, 1981.
15. LEVELS REFERENCE STUDY BOARD, FINAL REPORT TO THE INTERNATIONAL JOINT COMMISSION. International Joint Commission, Washington, D.C., and Ottawa, Canada, 1993.
16. LIMITED REGULATION OF LAKE ERIE. International Joint Commission, Washington, D.C., and Ottawa, Canada, 1983.
17. REGULATION OF GREAT LAKES WATER LEVELS. Report to the International Joint Commission by the International Great Lakes Levels Board, 1973.
18. ROLE OF VEGETATION IN SHORELINE MANAGEMENT. Fisheries and Environment Canada, and Great Lakes Basin Commission, 1977.
19. SHORE PROPERTY HAZARDS. Fisheries and Environment Canada and Ontario Ministry of Natural Resources, 1978.
20. SURFACE WATER DATA — Ontario. Annual reports by Water Survey of Canada, Environment Canada, Ottawa, Canada.
21. WATER RESOURCES DATA. United States Geological Survey, by States and Water Years.

Written by Peter Yee
Jim Lloyd

Design by Del McMillan Design Group
Heidi Weninger

First Printing, June 1985
Second Printing, Revised, January 1987
Third Printing, Revised, January 1989
Fourth Printing, Major Revision, March 1993
(Disponible en français)

